





TELECRANE®

Lee's Hi-Tech Ent. Co.,Ltd.

# F24 Industrial Radio Remote Controller

## Reliable - High Performance - Economic

- Durable nylon-fiber housing for extra shock resistance
- Low power consumption with 2 AA batteries (last up to 2 months in normal operation)
- Operating range up to 100 meters
- Programmable function setting through Windows-based software
- Economic efficiency, ease of operation
- Pre-wiring standard cable making wiring procedures easier
- 100% compatible components reducing stock of spare part
- Safety features: 4.3 billion unique ID code  
Hamming code  
Enhanced watch-dog circuit

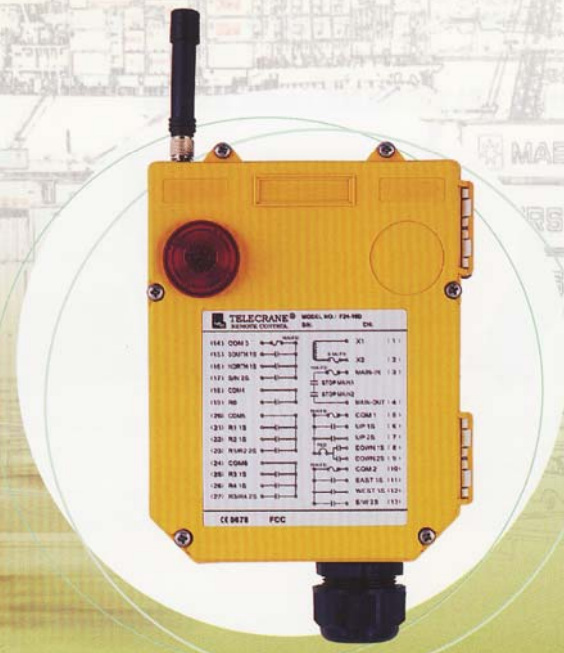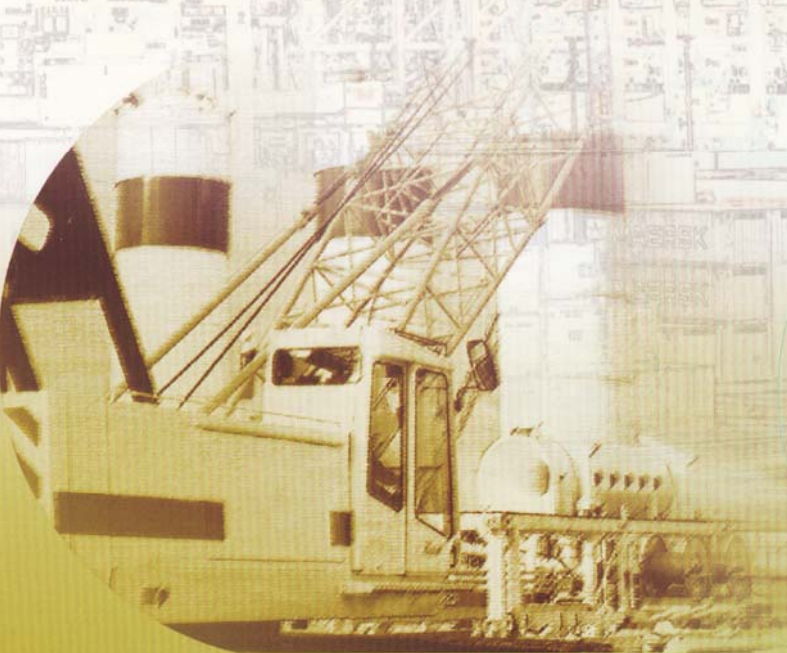

**Radio Control System best for Crane/mobile/forestry application/lift equipment**

● **F24-8 Series**

- 8 Single/double step button
- 1 Emergency button
- 1 Start pushbutton
- 1 Rotary key switch




● **F24-10 Series**

- 10 Single/double step button
- 1 Emergency button
- 1 Start pushbutton
- 1 Rotary key switch




● **F24 Receiver**



**Optional Accessories**

Operating Temp.	-35°C ~ +80°C
Maximum range	100 M
TX power supply	2 AA size Alkaline batteries
RX power supply	AC 48/110/220/380 V DC 12~24 V
Protection class	IP 65 Industrial standard
ID Code	4.3 billion (32 bit)
Hamming Distance	≥ 4
TX Dimension & Weight	186 x 61 x 51 mm Apprx. 255g (w/o batteries)
RX Dimension & Weight	200x162x107mm Apprx. 1220g (w/o cable)


**Optional Accessories**

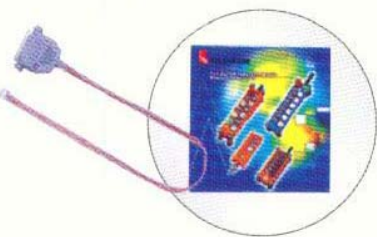

· CD Software & Program Cable



· Copier



· Passive Antenna



· Transmitter Protective Cover

**Other TELECRANE® radio series**



- \*6/12 single/double step pushbuttons and 5 step double joystick type
- \*PLL Synthesizer radio frequency control



- \*2/4/6 single/double step pushbuttons
- \*AC power supply is suitable for small crane/chain hoist
- \*Also available with DC power supply (12~24VDC) suitable for mobile application