



TELECRANE[®]

LEE'S HI-TECH ENTERPRISE CO., LTD.

F25 Industrial Radio Remote Controller



Safe - Reliable - Easy to Use

- Safety function of "STOP" & "CONTROL" (Cat. 4 / Cat. 3 EN ISO 13849-1)
- Compact design and Easy operating.
- Durable casing with extra shock resistance.
- Programmable function setting, suitable for diversified industrial applications.
- Remote Pairing technology, allowing instant maintenance on site.
- Pre-wiring standard cable for quick and easy installation.
- Built-in Alarm / Horn, no need to install extra warning devices.



TELECRANE[®]

LEE'S HI-TECH ENTERPRISE CO., LTD.

F25 Series Receiver



F25-6S/6D


- 6 Single/Double steps Buttons
- 1 EMS Button
- 1 START Button
- 1 Rotary Key
- 1 Alarm Button

F25-8S/8D

- 8 Single/Double steps Buttons
- 1 EMS Button
- 1 START Button
- 1 Rotary Key
- 1 Alarm Button

F25-10S/10D

- 10 Single/Double steps Buttons
- 1 EMS Button
- 1 START Button
- 1 Rotary Key
- 1 Alarm Button

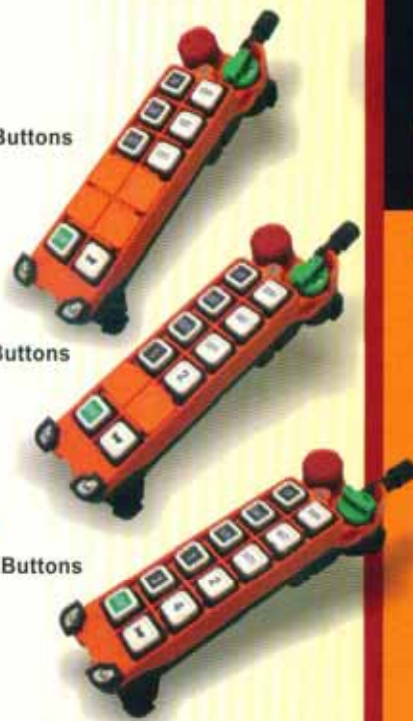

Optional Accessories



- Software CD
- USB Interface Cable



- Passive Antenna



- Copier



- Transmitter Protective Cover

Specifications

General

Operation Frequency	433.05 ~ 434.79MHz
Hamming Distance	≥ 4
Operation Range	Up to 100 Meters
Temperature Range	-40 °C ~ +85 °C
I.D. Code	2 ²⁰ sets (set by factory, never repeated)

Transmitter

Power Supply	Four 1.5 volts Batteries (AA Size)
Transmitting Power	< 10 mW
Power Indication	3-stage with LED Indication
Dimensions	186 x 61 x 51 mm (L x W x H)
Weight	about 265g (including batteries)

Receiver

Power Supply	24 / 48 / 110 / 220 / 380VAC (50/60Hz), ±20%
Dimensions	200 x 162 x 107 mm (L x W x H)
Weight (w/o cable)	about 1550g

CRANE AUTOMATION
& INDUSTRIAL SUPPLIES PTY LTD

www.telecrane.com.au
 P.O.Box 455 South Hurstville
 NSW 2221 Australia
 tel. 02 95708202
 email. info@telecrane.com.au

TELECRANE®

<http://www.telecrane.com.tw>



F25 Industrial Radio Remote Controller
 LEE'S HI-TECH ENTERPRISE CO., LTD.